

MRL-R-891

12

AR-003-304



**DEPARTMENT OF DEFENCE**  
**DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION**  
**MATERIALS RESEARCH LABORATORIES**  
**MELBOURNE, VICTORIA**

**REPORT**

**MRL-R-891**

AD A137851

**A STUDY OF THE MOTION AND STABILITY OF TORPEDOES**  
**IN 3 DEGREES OF FREEDOM**

**E.H. van Leeuwen**

THE UNITED STATES NATIONAL  
TECHNICAL INFORMATION SERVICE  
IS AUTHORIZED TO  
REPRODUCE AND SELL THIS REPORT

Approved for Public Release

DTIC  
SELECTED  
JUL 15 1984

D

DTIC  
FILE COPY



84 02 14 080

C  
Commonwealth of Australia  
JULY 1983

DEPARTMENT OF DEFENCE  
MATERIALS RESEARCH LABORATORIES

REPORT

MRL-R-891

A STUDY OF THE MOTION AND STABILITY OF TORPEDOES  
IN 3 DEGREES OF FREEDOM

E.H. van Leeuwen

ABSTRACT

The dynamic equations of motion for a torpedo represented by a prolate spheroid of fineness ratio  $l/d$  are studied in a non-rolling coordinate frame. This model considers the motion to be decoupled in the horizontal and vertical planes and with each plane spanned by three degrees of freedom. The resulting differential equations can be linearized and criteria for stability established.

Approved for Public Release

---

POSTAL ADDRESS: Director, Materials Research Laboratories  
P.O. Box 50, Ascot Vale, Victoria 3032, Australia

---

SECURITY CLASSIFICATION OF THIS PAGE

UNCLASSIFIED

## DOCUMENT CONTROL DATA SHEET

REPORT NO.	AR NO.	REPORT SECURITY CLASSIFICATION
MRL-R-891	AR-003-304	UNCLASSIFIED

TITLE  
A STUDY OF THE MOTION AND STABILITY OF TORPEDOES IN 3 DEGREES  
OF FREEDOM

AUTHOR(S)	CORPORATE AUTHOR
E.H. van Leeuwen	Materials Research Laboratories P.O. Box 50, Ascot Vale, Victoria 3032

REPORT DATE	TASK NO.	SPONSOR
JULY 1983	NAV 81/097	NAVY

CLASSIFICATION/LIMITATION REVIEW DATE	CLASSIFICATION/RELEASE AUTHORITY
	Superintendent, MRL Physical Chemistry Division

SECONDARY DISTRIBUTION

Approved for Public Release

ANNOUNCEMENT

Announcement of this report is unlimited

KEYWORDS

Torpedoes  
Equations of Motion  
Stability

COSATI GROUPS

1201 1908

ABSTRACT

The dynamic equations of motion for a torpedo represented by a prolate spheroid of fineness ratio  $l/d$  are studied in a non-rolling coordinate frame. This model considers the motion to be decoupled in the horizontal and vertical planes and with each plane spanned by three degrees of freedom. The resulting differential equations can be linearized and criteria for stability established.

Accession For

NTIS GRA&amp;I

DTIC TAB

Unannounced

Justification

By

Distribution/

Availability

SECURITY CLASSIFICATION OF THIS PAGE

## C O N T E N T S

	<u>Page No.</u>
1. INTRODUCTION	1
2. EQUATIONS OF MOTION IN THE VERTICAL PLANE	1
3. LINEARIZED EQUATIONS OF MOTION IN THE VERTICAL PLANE	7
4. EQUATIONS OF MOTION IN THE HORIZONTAL PLANE	10
5. LINEARIZED EQUATIONS OF MOTION - HORIZONTAL PLANE	11
6. STABILITY CRITERIA FOR MOTION IN THE VERTICAL AND HORIZONTAL PLANES	12
7. DISCUSSION	16
8. ACKNOWLEDGEMENTS	16
9. REFERENCES	17

# A STUDY OF THE MOTION AND STABILITY OF TORPEDOES IN 3 DEGREES OF FREEDOM

## 1. INTRODUCTION

In this paper, the dynamical elements which are necessary for the analytical development of motion and stability of a torpedo, or slender body are presented.

From classical mechanics it is well known that the translational motion of a body is described by the equation of linear momentum while the rotational motion is given by the equation of angular momentum. In general the translational and rotational motion of a torpedo, or slender body are coupled and need to be considered simultaneously. The general treatment of this problem is complicated since the motion is described by six degrees of freedom. It is possible however to obtain criteria for stability for example, in the horizontal plane by considering just three degrees of freedom, that is, by considering the motion of the centre of gravity, parallel and orthogonal to the longitudinal axis of the torpedo and rotational motion about a horizontal transverse axis through the centre of gravity. A similar procedure can also be used to derive the equations of motion in the vertical plane. These equations are all highly non-linear. However, on linearizing and decoupling the motion, a set of ordinary differential equations for the pitch and yaw angles are found. The Laplace transform of these differential equations yield criteria for stability in the vertical and horizontal planes.

In the case of a torpedo moving through fluid at rest at infinity, the linearized equations can also yield details of the trajectory. Analysis of the torpedo trajectory will be discussed elsewhere [1].

## 2. EQUATIONS OF MOTION IN THE VERTICAL PLANE

The equations of motion discussed in this section describe the dynamical behaviour of a torpedo in the vertical plane, moving with

rectilinear motion through a stationary ideal fluid of infinite extent. The question of dynamic stability and the derivation of the equations of motion will be addressed under the following assumptions:

- (a) the thrust, velocity and weight of the torpedo are constant, with the thrust tangential to the trajectory,
- (b) the shape of the torpedo is taken to be a prolate spheroid of fineness ratio  $l/d$  ( $l > d$ ), where  $l$  is the length of the torpedo and  $d$  its diameter; and
- (c) cavitation and free surface effects are assumed to be negligible.

The reason for assuming the torpedo is a prolate spheroid is to enable the mass accession (or added mass) due to the motion of the torpedo through the fluid to be incorporated into the dynamical equations of motion. Moreover when a body accelerates in a fluid, then not only does the torpedo accelerate but the fluid around the torpedo generally also moves. This means that the torpedo has to do work to increase the kinetic energy of both the torpedo and the fluid.

The nomenclature to be used throughout this paper in writing equations of motion is that the translational velocities will be denoted by components  $(u, v, w)$  and the rotational velocities by  $(\dot{\gamma}, \dot{\alpha}, \dot{\phi})$ .  $(\dot{\phantom{x}})$  denotes differentiation with respect to time.

A torpedo in rectilinear flight is subject to a number of hydrodynamic and hydrostatic forces as a consequence of the water pressure acting externally on the torpedo. A force-moment diagram is shown in Figure 2.1, for a torpedo on a steady course at set depth in the vertical plane. In this diagram  $T$  is the thrust generated by the propulsion unit in newtons (N) and is directed along the longitudinal axis with no resultant torque or misalignment.  $L$  and  $D$  are the resultant lift and drag forces in newtons respectively, acting parallel and orthogonal to the velocity  $V$  (m/s) in the  $(x, z)$  plane.  $B$  is the buoyancy (N) and represents the nett force of the hydrostatic pressures.  $W$  is the weight (N), and  $M_0$  the measured moment (N.m).  $N\dot{\alpha}$  represents the damping moment which is proportional to the angular velocity and  $F\dot{\alpha}$  is the transverse force associated with the damping moment in the vertical plane.  $\alpha$  is the orientation angle in pitch,  $\beta$  is the attack angle in pitch and  $\delta$  is the elevator angle in the vertical plane.

In order to find the equations of motion for a torpedo moving through an incompressible fluid, we firstly derive the kinetic energy of the fluid. When the velocity  $\underline{u}$  of the fluid is irrotational, we may introduce a velocity potential  $\phi$  satisfying:

$$\underline{u} = \nabla \phi^*,$$

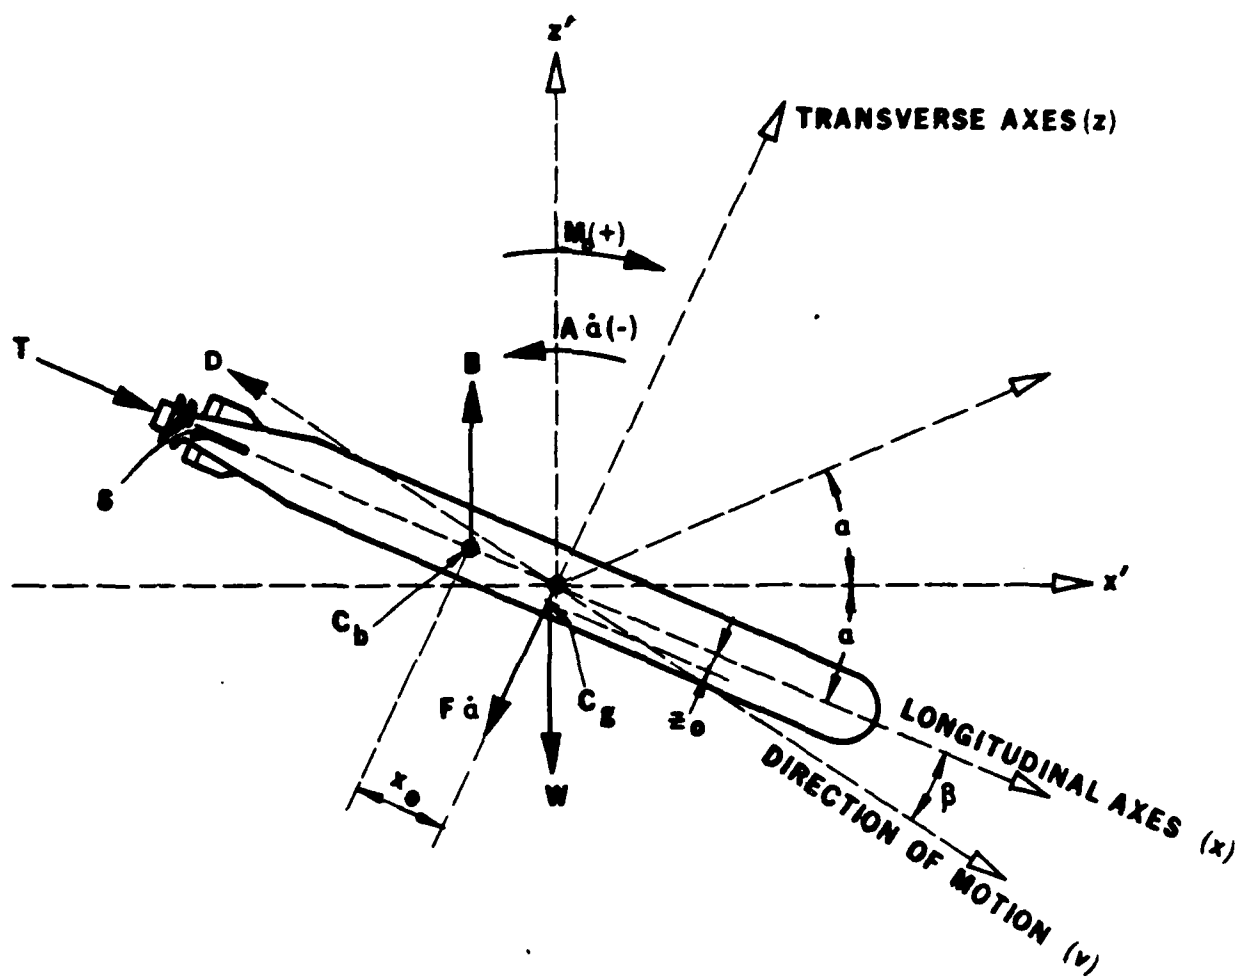


FIGURE 2-1 Hydrodynamic and hydrostatic forces acting on torpedo

(i)  $x, y, z$  Body Axes

(ii)  $x', y', z'$  Absolute Reference Frame

and because, for incompressible flow, ( $\nabla \cdot \underline{u} = 0$ ) it follows that

$$\nabla^2 \phi^* = 0.$$

For an irrotational flow characterized by the potential  $\phi^*$ , the kinetic energy  $E_F$  in the fluid domain  $\Lambda$  is given by [2]:

$$E_F = \frac{\rho}{2} \int_{\Lambda} \phi_{\mu}^* \phi_{\nu}^* d\Lambda, \quad (\mu = 1, 2, 3)$$

where  $\phi_{\mu}$  denotes differentiation of  $\phi$  with respect to  $\mu$ . Equivalently:

$$E_F = - \frac{\rho}{2} \int_S \phi^* \partial_n \phi^* ds, \quad (2.1)$$

where  $\underline{n}$  is a unit normal to the surface  $S$  of a slender body and  $\rho$  the density of the fluid. Let the translational velocity components of the torpedo or slender body be given by:

$$(u_1, u_2, u_3) = (u, v, w),$$

and the rotational motion by:

$$(u_4, u_5, u_6) = (\dot{\gamma}, \dot{\alpha}, \dot{\phi}).$$

For each component of the motion there exists a corresponding velocity potential for the fluid. That potential, per unit  $u_v$ , will be denoted by  $\phi_v$ . Hence

$$\phi^* = u_v \phi_v; \quad (v = 1, \dots, 6), \quad (2.2)$$

i.e.,

$$\phi^* = \phi_1 u + \phi_2 v + \phi_3 w + \phi_4 \dot{\gamma} + \phi_5 \dot{\alpha} + \phi_6 \dot{\phi}. \quad (2.3)$$

Substitution of (2.2) into (2.1) yields:



$$E_F = 1/2 A_{\mu\nu} u_\mu u_\nu \quad ; \quad (\mu, \nu = 1, \dots, 6) \quad , \quad (2.4)$$

where the cartesian tensor  $A_{\mu\nu}$  is defined by:

$$A_{\mu\nu} = -\rho \int_S \phi_\mu \partial_n \phi_\nu \, dS,$$

and satisfies the symmetry condition:

$$A_{[\mu\nu]} = 0.$$

We call the elements of  $A_{\mu\nu}$  the components of the added-mass tensor [2].

When there is only motion in the vertical plane (i.e., the (x,z) plane) the velocity potential is spanned by just three degrees of freedom and may be written in the absence of torpedo roll (non-rolling coordinate system) as:

$$\phi^* = \phi_1 u + \phi_3 w + \phi_5 \dot{\alpha}. \quad (2.5)$$

It follows from (2.4) that the quadratic form of the kinetic energy of the fluid in this coordinate system is:

$$E_F = 1/2 \{ A_{11} u^2 + A_{33} w^2 + 2A_{35} w\dot{\alpha} + A_{55} \dot{\alpha}^2 \}, \quad (2.6)$$

with all other components of  $A_{\mu\nu}$  zero when  $\phi^*$  is given by (2.5). This results from the symmetry of the torpedo i.e., replacing  $u$  by  $-u$  should leave energy invariant; so  $A_{13} = A_{15} = 0$ .

The kinetic energy  $E_T$  of the torpedo can similarly be expressed as a quadratic form, i.e.,

$$E_T = 1/2 B_{\mu\nu} u_\mu u_\nu \quad ; \quad B_{[\mu\nu]} = 0,$$

where

$$B_{uv} = \begin{bmatrix} M & 0 & 0 & 0 & Mz_0 & -My_0 \\ 0 & M & 0 & -Mz_0 & 0 & Mx_0 \\ 0 & 0 & M & My_0 & -Mx_0 & 0 \\ 0 & Mz_0 & -My_0 & I_{11} & -I_{12} & -I_{13} \\ -Mz_0 & 0 & Mx_0 & -I_{21} & I_{22} & -I_{23} \\ My_0 & -Mx_0 & 0 & -I_{31} & -I_{31} & I_{33} \end{bmatrix} \quad (2.7)$$

In (2.7),  $I_{ij}$  are the components of the moment of inertia tensor,  $x_0$ ,  $y_0$  and  $z_0$  the coordinates of the centre of mass and  $M$  the mass of the torpedo. For motion in the vertical plane with the centre of gravity of the torpedo located directly below the longitudinal axis (a distance  $z_0$ ) the kinetic energy of the torpedo is given by:

$$E_T = \frac{1}{2} \{ Mu^2 + Mw^2 + I_{22}\dot{\alpha}^2 + 2Mz_0 u\dot{\alpha} \}, \quad (2.8)$$

and hence the total energy by:

$$E = \frac{1}{2} \{ (A_{11} + M)u^2 + (A_{33} + M)w^2 + (I_{22} + A_{55})\dot{\alpha}^2 + 2A_{35}w\dot{\alpha} + 2Mz_0 u\dot{\alpha} \}. \quad (2.9)$$

If  $\underline{G}$  and  $\underline{H}$  are the linear momentum and total angular momentum respectively then:

$$\underline{G} = \underline{e}_j \partial_{u_j} E = \{ (M + A_{11})u + Mz_0 \dot{\alpha}, 0, (M + A_{33})w + A_{35} \dot{\alpha} \}; j=1,2,3, \quad (2.10)$$

and

$$\underline{H} = \underline{e}_k \partial_{u_k} E = \{ 0, (I_{22} + A_{55})\dot{\alpha} + Mz_0 u + A_{35} w, 0 \}; k=4,5,6. \quad (2.11)$$

Furthermore if  $\underline{F}^*$  and  $\underline{L}^*$  are the resultant external force and momentum respectively of both the torpedo and the fluid and if an inertial reference frame is fixed to the torpedo moving with velocity  $\underline{u} = (u, 0, w)$  and angular velocity  $\underline{\omega} = (0, \dot{\alpha}, 0)$  then:

$$\underline{F}^* = \dot{\underline{G}} + \underline{\omega} \times \underline{G}, \quad (2.12a)$$

and

$$\underline{L}^* = \underline{\dot{H}} + \underline{\omega XH} + \underline{uXG} \quad , \quad (2.12b)$$

where X is the vector product. More explicitly:

$$\underline{F}^* = \{(M + A_{11})\dot{u} + Mz_0\ddot{\alpha} + (M + A_{33})w\dot{\alpha} + A_{35}\dot{\alpha}^2, 0, (M + A_{33})\dot{w} + A_{35}\ddot{\alpha} - (M + A_{11})u\dot{\alpha} - Mz_0\dot{\alpha}^2\} \quad (2.13)$$

and

$$\underline{L}^* = \{0, (I_{22} + A_{55})\ddot{\alpha} + Mz_0\dot{u} + A_{35}\dot{w} - uw(A_{33} - A_{11}) - A_{35}u\dot{\alpha} + Mz_0w\dot{\alpha}, 0\}. \quad (2.14)$$

Resolution of the forces in Figure 2.1 acting parallel and orthogonal to the direction of motion yields:

$$\underline{F}^* = \{T - D\cos\beta + (B-W)\sin\alpha - L\sin\beta, 0, -D\sin\beta - (B-W)\cos\alpha - L\cos\beta + F\dot{\alpha}\}. \quad (2.15)$$

Similarly, the resolution of torques acting about the centre of gravity yields:

$$\underline{L}^* = \{0, M_0 - A\dot{\alpha} + Bx_0\cos\alpha - Wz_0\sin\alpha, 0\}. \quad (2.16)$$

Equating (2.13) and (2.15), (2.14) and (2.16) the equations governing the motion of the torpedo in the (x,z) plane can be expressed as:

$$T - D\cos\beta + (B-W)\sin\alpha - L\sin\beta = (M + A_{11})\dot{u} + Mz_0\ddot{\alpha} + (M + A_{33})w\dot{\alpha}, \quad (2.17a)$$

$$-D\sin\beta - (B-W)\cos\alpha - L\cos\beta + F\dot{\alpha} = (M + A_{33})\dot{w} + A_{35}\ddot{\alpha} - (M + A_{11})u\dot{\alpha} - Mz_0\dot{\alpha}^2, \quad (2.17b)$$

$$M_0 - A\dot{\alpha} + Bx_0\cos\alpha - Wz_0\sin\alpha = (I_{22} + A_{55})\ddot{\alpha} + Mz_0\dot{u} + A_{35}\dot{w} - uw(A_{11} - A_{33}) - A_{35}u\dot{\alpha} + Mz_0w\dot{\alpha}, \quad (2.17c)$$

where  $(u, 0, w) = (V\cos\beta, 0, V\sin\beta)$ , and V is defined in Figure 2.1.

### 3. LINEARIZED EQUATIONS OF MOTION IN THE VERTICAL PLANE

In general, analytic solutions to (2.17) are not possible, however upon linearizing these equations, solutions can be found. To do this we assume that the hydrodynamic forces and moments are approximately linear in attack angle and turning rate.

The forces and moments appearing in (2.17) are both functions of  $\beta$  and  $\delta$  which can be taken to be independent and small (less than  $10^\circ$ ). Expanding  $L$  and  $M_0$  in a Maclaurin series and neglecting all but first order terms yields:

$$S(\beta, \delta) \approx S(0,0) + S_\delta \delta + S_\beta \beta,$$

where  $S_\delta$  for example denotes partial differentiation of  $S$  with respect to  $\delta$ . If the torpedo is highly symmetrical we can assume without loss of generality that  $S(0,0) = 0$ . Furthermore if  $\alpha$  is also small then we have:

$$\cos \alpha = \cos \beta \approx 1,$$

$$\sin \alpha \approx \alpha, \quad \sin \beta \approx \beta.$$

Incorporation of the above approximations into the equations of motion yield the following set of linear equations

$$(T - D) + (B - W)\alpha = Mz_0 \ddot{\alpha}, \quad (3.1a)$$

$$-(D + L_\beta)\beta - A_{35} \ddot{\alpha} - (B - W) - L_\delta \delta + F\dot{\alpha} = -M_T V\dot{\alpha} + M_L V\dot{\beta}, \quad (3.1b)$$

$$M_\delta \delta + M_1 \beta + M_2 \dot{\alpha} + Bx_0 - Wz_0 \alpha - A_{35} V\dot{\beta} = \Sigma \ddot{\alpha}, \quad (3.1c)$$

where

$$m_T := M + A_{11}, \quad (3.2a)$$

$$m_L := M + A_{33}, \quad (3.2b)$$

$$M_1 := M_\beta - V^2(A_{11} - A_{33}), \quad (3.2c)$$

$$M_2 := -(A - VA_{35}), \quad (3.2d)$$

$$\Sigma := I_{22} + A_{55}. \quad (3.2e)$$

In terms of the coefficients of inertia for a prolate spheroid [3,4] (3.2 a,b,c,e) can be expressed as:

$$m_T = M + k_1 M_f,$$

$$m_L = M + k_2 M_f,$$

$$M_1 = M_\beta - V^2 M_f (k_1 - k_2),$$

$$\Sigma = I_{22} + k' M_f,$$

where  $M_f$  is the displaced fluid mass and  $k_1$ ,  $k_2$  and  $k'$  the coefficients of inertia:

$$k_1 = \alpha_0 (2 - \alpha_0)^{-1},$$

$$k_2 = \beta_0 (2 - \beta_0)^{-1},$$

$$k' = (a^2 - b^2)^2 (\beta_0 - \alpha_0) \{ (a^2 + b^2) [2(a^2 - b^2) - (a^2 + b^2)(\beta_0 - \alpha_0)] \}^{-1},$$

where  $a$  is the semi-major axis and  $b$  the semi-minor axis of the prolate spheroid. Furthermore:

$$\alpha_0 = \frac{1-e^2}{e^3} \left( \ln \frac{(1+e)}{(1-e)} - 2e \right),$$

$$\beta_0 = \frac{1-e^2}{e^3} \left( \frac{e}{1-e^3} - \frac{1}{2} \ln \frac{(1+e)}{(1-e)} \right),$$

where  $e$  is the eccentricity.

If  $\rho$  is the density of the fluid, and  $A$ ,  $l$  and  $V$  the cross-sectional area, the length and velocity of the torpedo respectively, then (3.1b) and (3.1c) can be expressed in terms of the hydrodynamic coefficients which are defined below on dividing (3.1b) by:

$$A_1 := \frac{1}{2} \rho A V^2, \quad (3.3a)$$

and (3.1c) by

$$A_2 := \frac{1}{2} \rho A V^2 \ell, \quad (3.3b)$$

together with a change in the independent time variable  $t$  i.e., the time variable  $t$  is changed to the dimensionless arc length parameter  $\xi$ , proportional to  $t$  and defined by:

$$\xi := t t_c^{-1},$$

where  $t_c$  is called the characteristic time. On substitution of (3.3a) and (3.3b) into (3.1b) and (3.1c) respectively it becomes apparent that  $t_c$  is best chosen as  $\ell V^{-1}$ , where  $\ell$  is the length of the torpedo. This yields:

$$-A_{35}^* \alpha'' + (C_{F_t} + m_L^*) \alpha' - m_T^* \beta' - (C_D + C_{L_\beta}) \beta + C_{L_\delta} \delta - B^* = 0, \quad (3.4a)$$

and

$$\Sigma^* \alpha'' - C_{M_d} \alpha' + A_{35}^* \beta' - C_M \beta - C_{M_\delta} \delta - B^{**} + W^{**} \alpha Z_O = 0, \quad (3.4b)$$

where  $()'$  denotes differentiation with respect to  $\xi$ . In the vertical plane the hydrodynamic coefficients, corrected for the effects of entrained water are:

$C_D := D A_1^{-1}$ ,	is the drag coefficient,
$C_{L_\beta} := L_\beta A_1^{-1}$ ,	the lift coefficient,
$C_{F_t} := F (\frac{1}{2} \rho A V \ell)^{-1}$ ,	the transverse force coefficient,
$C_M := M_1 A_2^{-1}$ ,	the moment coefficient
$C_{M_d} := M_2 (\frac{1}{2} \rho A V \ell^2)^{-1}$ ,	the damping moment coefficient
$C_{L_\delta} := L_\delta A_1^{-1}$ ,	the elevator lift coefficient,
$C_{M_\delta} := M_\delta A_2^{-1}$ ,	the elevator moment coefficient.

Other terms appearing in (3.4) are defined as follows:

$$A_{35}^* := A_{35} (1/2 \rho A l^2)^{-1}; \quad m_L^* = M_L (1/2 \rho A l)^{-1}; \quad m_T^* = m_T (1/2 \rho A l)^{-1};$$

$$B^* := (B-W)A_1^{-1}; \quad \Sigma^* := \Sigma (1/2 \rho A l^3)^{-1}; \quad B^{**} := x_0 B A_2^{-1}; \quad W^{**} := W A_2^{-1}.$$

#### 4. EQUATIONS OF MOTION IN THE HORIZONTAL PLANE

The equations describing the motion in the horizontal plane can be derived following a similar procedure to the one given for deriving the equations in the vertical plane. A number of minor changes are all that are necessary so not all the details are given here. For example, in the horizontal plane the gravity terms, weight and buoyancy can be equated to zero in both the force and moment equation.

Take  $\delta$  to be the rudder angle,  $\phi$  the orientation angle in the horizontal plane (i.e. yaw angle) and  $\psi$  the angle of attack in yaw. Furthermore  $\underline{u} = (0, 0, \phi)$  and  $\underline{v} = (u, v, 0)$ . With no displacement of the centre of gravity in the  $(x, y)$  plane, the total kinetic energy of both the fluid and torpedo can be expressed as:

$$E = 1/2 \{ (M + A_{11})u^2 + (M + A_{22})v^2 + (A_{66} + I_{33})\dot{\phi}^2 + 2A_{26}v\dot{\phi} \}. \quad (4.1)$$

From (4.1) the linear momentum and total angular momentum have the form:

$$\underline{G} = \{ (M + A_{11})u, (M + A_{22})v + A_{26}\dot{\phi}, 0 \},$$

and

$$\underline{H} = \{ 0, 0, (A_{66} + I_{33})\dot{\phi} + A_{26}v \},$$

respectively. From (2.12) it further follows that the external force  $\underline{F}^*$  and momentum  $\underline{L}^*$  are given by:

$$\underline{F}^* = \{ (M + A_{11})\ddot{u} - (M + A_{22})v\ddot{\phi} - A_{26}\ddot{\phi}^2, (M + A_{22})\ddot{v} + A_{26}\ddot{\phi} + (M + A_{11})u\ddot{\phi}, 0 \}, \quad (4.2a)$$

and

$$\underline{L}^* = \{0, 0, (A_{66} + I_{33}) \ddot{\phi} + A_{26}(\dot{v} + \ddot{\phi}u) + uv(A_{22} - A_{11})\}, \quad (4.2b)$$

respectively. Expanding the left side of (4.2) in a Maclaurin series, neglecting all but first order terms gives:

$$\underline{F}^* = (F^1(u, \dot{\phi}, \delta), F^2(v, \dot{\phi}, \delta), 0) \approx (F_u^1 u + F_{\dot{\phi}}^1 \dot{\phi} + F_{\delta}^1 \delta, F_v^2 v + F_{\dot{\phi}}^2 \dot{\phi} + F_{\delta}^2 \delta, 0), \quad (4.3a)$$

and

$$\underline{L}^* = (0, 0, L^3(v, \dot{\phi}, \delta)) \approx (0, 0, L_v^3 v + L_{\dot{\phi}}^3 \dot{\phi} + L_{\delta}^3 \delta). \quad (4.3b)$$

Equating (4.2) and (4.3) yields:

$$F_u^1 u + F_{\dot{\phi}}^1 \dot{\phi} + F_{\delta}^1 \delta \approx m_L \ddot{u} - m_T v \dot{\phi} - A_{26} \dot{\phi}^2, \quad (4.4a)$$

$$F_v^2 v + F_{\dot{\phi}}^2 \dot{\phi} + F_{\delta}^2 \delta \approx m_T \dot{v} + A_{26} \ddot{\phi} + m_L u \dot{\phi}, \quad (4.4b)$$

$$L_v^3 v + L_{\dot{\phi}}^3 \dot{\phi} + L_{\delta}^3 \delta \approx \Theta \ddot{\phi} + A_{26}(\dot{v} + \ddot{\phi}u) + uv(A_{22} - A_{11}), \quad (4.4c)$$

where

$$m_L = M + A_{11},$$

$$m_T = M + A_{22},$$

$$\Theta = I_{33} + A_{66},$$

and

$$(u, v, \phi) = (V \cos \Psi, -V \sin \Psi, 0), \quad V = \text{constant}.$$

## 5. LINEARIZED EQUATIONS OF MOTION - HORIZONTAL PLANE

Following the method of Section 3, equations (4.4b) and (4.4c) can be expressed as:



$$-C_{L_\Psi} \Psi + (C_{F_t} - m_L^*) \phi' + C_{L_\delta} \delta - A_{26}^* \phi'' + m_T^* \Psi' = 0, \quad (5.1a)$$

and

$$C_M \Psi + C_{M_d} \phi' + A_{26}^* \Psi' + C_{M_\delta} \delta - \Theta^* \phi'' = 0. \quad (5.1b)$$

In the (x,y) plane the hydrodynamic coefficients corrected for the effects of entrained water are defined by:

$$\begin{aligned} C_{L_\Psi} &:= \frac{F_v^2 v}{1/2 \rho A v^2}, & \text{the lift coefficient,} \\ C_{F_t} &:= \frac{F_\phi^2}{\phi} (1/2 \rho A v l)^{-1}, & \text{transverse force coefficient,} \\ C_{L_\delta} &:= F_\delta^2 A_1^{-1}, & \text{rudder lift coefficient,} \\ C_{M_\delta} &:= L_\delta^3 A_2^{-1}, & \text{rudder moment coefficient,} \\ C_{M_d} &:= L_2 (1/2 \rho A v l^2)^{-1}, & \text{damping moment coefficient,} \\ C_M &:= L_1 (1/2 \rho A v^2 l)^{-1}, & \text{moment coefficient,} \end{aligned}$$

where  $L_1 := v L_v^3 - v^2 (A_{22} - A_{11})$ ,  $L_2 := L_\phi^3 - A_{26} v$ ,  $A_{26}^* := A_{26} (1/2 \rho A l^2)^{-1}$

and  $\Theta^* := \Theta (1/2 \rho A l^3)^{-1}$ . The coefficients  $m_T^*$  and  $m_L^*$  have the same algebraic form as given in Section 3.

## 6. STABILITY CRITERIA FOR MOTION IN THE HORIZONTAL AND VERTICAL PLANES

The problem of determining stability of a linear system is one of finding roots of the characteristic equation, found on taking the Laplace transform (L-transform) of the equation governing the motion. In general if the characteristic equation of the transformed equation is given by [5]:

$$\alpha_0 s^n + \alpha_1 s^{n-1} + \dots + \alpha_{n-1} s + \alpha_n, \quad (6.1)$$

then the criteria for stability are that the coefficients of the characteristic function (6.1) have roots that lie in the left half of the s-plane. This is both a necessary and sufficient condition and is equivalent to saying all the determinants:

$$D_1 = a_1, \quad D_2 = \begin{vmatrix} a_1 & a_0 \\ a_3 & a_2 \end{vmatrix}, \quad D_3 = \begin{vmatrix} a_1 & a_0 & 0 \\ a_3 & a_2 & a_1 \\ a_5 & a_4 & a_3 \end{vmatrix}, \dots,$$

must be positive, i.e.,

$$D_1 > 0, \quad D_2 > 0, \quad D_3 > 0, \dots$$

If any coefficient of any power of s is either negative or zero, then there is at least one root in the right half of the s-plane or on the imaginary axis of the s-plane in which case the system is unstable. A more complete description of the motion is unnecessary since all that is required is a knowledge of whether or not the system is stable, i.e., whether a response to a perturbation remains bounded or grows as t (or  $\xi$ )  $\rightarrow \infty$ .

(a) Conditions for stable motion in the horizontal plane

On differentiation of (5.1) it is not difficult to show that the decoupled equation for yaw angle  $\phi$  in the  $\xi$  domain can be expressed as:

$$\alpha_4 \phi'''' + \alpha_3 \phi''' + \alpha_2 \phi'' + \alpha_1 \phi' + \alpha_0 \phi = 0, \quad (6.2)$$

where

$$\begin{aligned} \alpha_4 &:= m_T^* \theta^* - A_{26}^{*2}, \\ \alpha_3 &:= -m_T^* C_{M_d} + A_{26}^* (C_{F_t} - m_L^*) - C_{L_\psi} \theta^* - C_M A_{26}^*, \\ \alpha_2 &:= -(m_L^* - C_{F_t}) C_M + C_{L_\psi} C_{M_d}, \\ \alpha_1 &:= A_{26}^* C_{L_\delta} - m_T^* C_{M_\delta}, \\ \alpha_0 &:= C_M C_{L_\delta} + C_{L_\psi} C_{M_\delta}. \end{aligned} \quad (6.3)$$

Without loss of generality we assume that the desired heading is  $\phi = 0$ , then (6.2) represents the error in heading. For stability it is necessary that  $\phi \rightarrow 0$ .

The L-transform of (6.2) yields:

$$\begin{aligned} \bar{\phi}(\alpha_4 s^3 + \alpha_3 s^2 + \alpha_2 s) + \bar{\delta}(\alpha_1 s + \alpha_0) = & (s^2 \phi_0 \alpha_4 + s(\alpha_4 \phi'_0 + \alpha_3 \phi_0) + \alpha_4 \phi''_0 \\ & + \alpha_3 \phi'_0 + \alpha_2 \phi_0 + \alpha_1 \delta_0), \end{aligned} \quad (6.4)$$

where  $s$  is the transform variable and  $\phi_0, \phi'_0, \phi''_0, \delta_0$ , initial conditions.

The stability of the torpedo in the horizontal plane, can be inferred provided the rudder response  $\delta$  is known. For example if  $c_1$  is a real constant i.e.,  $\delta = c_1 \phi$ , then (6.4) becomes

$$\bar{\phi}(s) = \frac{s^2 \phi_0 \alpha_4 + s(\alpha_4 \phi'_0 + \alpha_3 \phi_0) + \alpha_4 \phi''_0 + \alpha_3 \phi'_0 + \alpha_2 \phi_0 + \alpha_1 \delta_0}{\alpha_4 s^3 + \alpha_3 s^2 + (\alpha_2 + c_1 \alpha_1)s + \alpha_0 c_1} =: \frac{P(s)}{Q(s)}.$$

For stability the degree of the polynomial  $Q(s)$  must be greater than  $P(s)$  and the roots of  $Q(s)$  in the complex  $s$ -plane should lie in the left half. Furthermore the determinants:

$$D_1 = \alpha_3; \quad D_2 = \begin{vmatrix} \alpha_3 & \alpha_4 \\ \alpha_0 c_1 & \alpha_2 + c_1 \alpha_1 \end{vmatrix}; \quad D_3 = D_1 D_2,$$

should all be positive.

If the torpedo has neutral rudder response, that is  $\delta=0$  and further if the origin of the coordinates is at the centre of the prolate spheroid, (i.e.,  $\Lambda_{26} = 0$  as well as  $c_1 = 0$ ) then the above determinants reduce to:

$$\alpha_3 > 0 \quad \text{and} \quad \alpha_2 > 0. \quad (6.5)$$

For small angles of attack the stability criteria for a torpedo without controls can be expressed in terms of the hydrodynamic coefficients as:

$$C_{L_y} \theta^* + m_T^* C_{M_d} < 0, \quad (6.6a)$$

and

$$C_{M_d} C_{L_\psi} - (m_L^* - C_{F_t}) C_M > 0, \quad (6.6b)$$

The general solution of (6.2) for neutral rudder response and  $A_{26}^* = 0$  can be expressed as:

$$\phi(\zeta) = A e^{a_+ \zeta} + B e^{a_- \zeta},$$

where

$$a_{\pm} = - \frac{\alpha_3 \pm (\alpha_3^2 - 4\alpha_2\alpha_4)^{1/2}}{2\alpha_4},$$

are the roots of the auxiliary equation of (6.2). For dynamic stability  $\phi(\zeta) \rightarrow 0$ , which means the roots  $a_{\pm}$  must have negative real parts, as well as  $\alpha_3 < 4\alpha_2\alpha_4$ . This will be the case only if (6.5) is satisfied, since  $\alpha_4$  is always positive.

A second case of interest refers to the motion of a torpedo with zero attack angle in yaw ( $\psi=0$ ) and no controls. In such cases the above stability analysis yields  $C_{M_d} > 0$  for the transverse damping moment coefficient.

(b) Condition for stable motion in the vertical plane

Following a method similar to the one described for stability in the vertical plane, on decoupling (3.4) the equation for the pitch angle  $\alpha$  is:

$$\beta_6 \alpha'''' + \beta_5 \alpha''' + \beta_4 \alpha'' + \beta_3 \alpha' + \beta_2 \delta' + \beta_1 \delta + \beta_0 = 0, \quad (6.7)$$

where

$$\beta_6 := A_{35}^{*2} + m_T^* \Sigma^*,$$

$$\beta_5 := A_{35}^* (C_{F_t} + m_L^*) - m_T^* C_{M_d} - A_{35}^* C_M + \Sigma^* (C_D + C_{L_\beta}),$$

$$\beta_4 := m_T^* W^{**} z_o - C_M (C_{F_t} + m_L^*) - C_{M_d} (C_D + C_{L_\beta}),$$

$$\beta_3 := W^{**} z_o (C_D + C_{L_\beta})$$

$$\beta_2 := A_{35}^* C_{L\delta} - m_T^* C_{M\delta} ,$$

$$\beta_1 := -C_M C_{L\delta} - C_{M\delta} (C_D + C_{L\beta}) ,$$

$$\beta_0 := B^* C_M - B^{**} (C_D + C_{L\beta}) .$$

As in case (a), stability criteria can be found if the response  $\delta$  is known. For example if  $\delta = c_2 \alpha$ , the L-transform of (6.7) yields:

$$\bar{\alpha} = \frac{s^3 \alpha_0 \beta_6 + s^2 (\alpha_0 \beta_5 + \alpha_0' \beta_6) + s (\alpha_0'' \beta_6 + \alpha_0' \beta_5 + \alpha_0 \beta_4 + c_2 \alpha_0 \beta_2) - \beta_0}{s \{ \beta_6 s^3 + \beta_5 s^2 + s (\beta_4 + c_2 \beta_2) + \beta_3 + \beta_1 c_2 \}} ,$$

and a necessary condition for stability is that all the determinants

$$D_1 = \beta_5 ,$$

$$D_2 = \begin{vmatrix} \beta_5 & \beta_6 \\ \beta_3 + c_2 \beta_1 & \beta_4 + c_2 \beta_2 \end{vmatrix}$$

$$D_3 = D_1 D_2 ,$$

be positive.

## 7. DISCUSSION

The model described above considers some basic aspects of torpedo motion and stability in both the vertical and horizontal planes. The question of accessibility of the stability criteria depends on a knowledge of the hydrodynamic coefficients for a particular torpedo body. In the foregoing discussion no explicit studies were made of torpedo stability due to lack of data relating to hydrodynamic coefficients of the torpedo to which this report was directed. Therefore this study should be considered as a first step only in developing a knowledge of motion for submerged bodies.

## 8. ACKNOWLEDGEMENTS

Aspects of this work were stimulated by discussions with A. Coman [6,7], D.R. Hiscock [8] and members of TASK Nav 81/097.

## 9. REFERENCES

1. van Leeuwen, E.H., (1982). Maneuverability of Torpedoes in the Horizontal Plane. MRL-R-892.
2. Chia-Shun Yih, (1978). Fluid Mechanics. (West River Press, Ann Harbour, Michigan, USA).
3. Kennard, E.H. (1967). Irrotational Flow of Frictionless Fluids mostly of invariable density. (David Taylor Model Basin Report Number 2299).
4. Lamb, H. (1975). Hydrodynamics (Sixth Edition, Cambridge University Press).
5. Gupta, S.C. and Hasdorff, H. (1970). Fundamentals of Automatic Control (John Wiley and Sons).
6. Coman, A. (1981). Admiralty Underwater Weapons Establishment, Portland Dorest, England. Private Communication.
7. Coman, A. (1982). "Equations of Motion and Definition of Axes Systems", Private Communication.
8. Hiscock, D.R. (1981). Admiralty Underwater Weapons Establishment, Portland Dorest, England. Private Communication.

(MRL-R-891)

DISTRIBUTION LIST

MATERIALS RESEARCH LABORATORIES

Director  
Superintendent, Physical Chemistry Division  
Dr B.W. Thorpe  
Dr G.J. Jenks  
Library (2 copies)  
Dr E. Van Leeuwen

DEPARTMENT OF DEFENCE

Chief Defence Scientist/Deputy Chief Defence Scientist/ (1 copy)  
Controller, Projects and Analytical Studies/  
Superintendent, Science and Technology Programme  
Army Scientific Adviser  
Air Force Scientific Adviser  
Navy Scientific Adviser  
Officer-in-Charge, Document Exchange Centre (17 copies)  
Technical Reports Centre, Defence Central Library  
Central Office, Directorate of Quality Assurance - Air Force  
Deputy Director, Scientific and Technical Intelligence,  
Joint Intelligence Organisation  
Librarian, Bridges Library  
Librarian, Engineering Development Establishment  
Defence Science Representative (Summary Sheets Only)  
Australia High Commission, London  
Counsellor Defence Science, Washington, D.C. (Summary Sheets Only)  
Librarian, (Through Officer-in-Charge), Materials Testing  
Laboratories, Alexandria, NSW  
Senior Librarian, Aeronautical Research Laboratories  
Senior Librarian, Defence Research Centre, Salisbury, SA

DEPARTMENT OF DEFENCE SUPPORT

Deputy Secretary, DDS  
Head of Staff, British Defence Research & Supply Staff (Aust.)

OTHER FEDERAL AND STATE DEPARTMENTS AND INSTRUMENTALITIES

NASA Canberra Office, Woden, ACT  
The Chief Librarian, Central Library, CSIRO  
Library, Australian Atomic Energy Commission Research Establishment

MISCELLANEOUS - AUSTRALIA

Librarian, State Library of NSW, Sydney, NSW  
University of Tasmania, Morris Miller Lib., Hobart, Tas.

(MRL-R-891)

DISTRIBUTION LIST  
(Continued)

MISCELLANEOUS

Library - Exchange Desk, National Bureau of Standards, USA  
UK/USA/CAN/NZ ABCA Armies Standardisation Representative (4 copies)  
The Director, Defence Scientific Information & Documentation  
Centre, India  
Military, Naval and Air Adviser, High Commission of India, Canberra  
Director, Defence Research Centre, Kuala Lumpur, Malaysia  
Exchange Section, British Library, UK  
Periodicals Recording Section, Science Reference Library,  
British Library, UK  
Library, Chemical Abstracts Service  
INSPEC: Acquisition Section, Institute of Electrical Engineers, UK  
Engineering Societies Library, USA  
Aeromedical Library, Brooks Air Force Base, Texas, USA  
Ann Germany Documents Librarian, The Centre for Research  
Libraries, Chicago, Ill.  
Defence Attache, Australian Embassy, Bangkok, Thailand  
(Attn. D. Pender)